



■ INTRODUCTION OF MATERIAL SRIM 020(SF-2)

It is made of high quality low-carbon steel, sintered porous bronze as its interlayer, with the compound of POM & Pb as its surface. And has good load capacity & wear-resistant. It's used in vehicle chassis, forming machine tools, steel metallurgical machinery, mineral mountain machinery, hydraulic industry and rolling steel industry, etc.




POM

Sintered porous
bronze alloy layer

Steel base layer

■ PHYSICAL AND MECHANICAL PROPERTY

Performance index		Data
Load capacity P	Static load	250 N/mm ²
	Dynamic load	140 N/mm ²
Max. Sliding speed V	Grease lubricant	2.5m/s
Maximum PV value	Grease lubricant	2.8 N/ mm ² .m/s
Friction coef μ	Grease lubricant	0.05 ~ 0.25
Working temperature		-40°C ~ +130°C
Thermal conductivity		4 W/m · k
Coefficient of linear expansion		12 × 10 ⁻⁶ /K

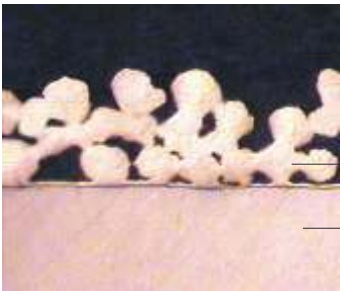

POM

Sintered porous bronze alloy layer

Steel base layer

■ INTRODUCTION OF MATERIAL SRIM 021(SF-2H)

It is made of high quality low-carbon steel, sintered porous bronze as its interlayer, with the compound of POM as its surface. And has good load capacity & wear-resistant. It's used in vehicle chassis, forming machine tools, steel metallurgical machinery, mineral mountain machinery, hydraulic industry and rolling steel industry, etc. It is without lead, can meet the requirements of environment protection.

■ PHYSICAL AND MECHANICAL PROPERTY

Performance index		Data
Load capacity P	Static load	250 N/mm ²
	Dynamic load	140 N/mm ²
Max. Sliding speed V	Grease lubricant	2.5m/s
Maximum PV value	Grease lubricant	2.8 N/ mm ² .m/s
Friction coef μ	Grease lubricant	0.05 ~ 0.25
Working temperature		-40°C ~ +130°C
Thermal conductivity		4 W/m · k
Coefficient of linear expansion		12 × 10 ⁻⁶ /K



POM

Sintered porous
bronze alloy layer


Steel base layer

■ INTRODUCTION OF MATERIAL SRIM 022(SF-2S)

It is made of high quality low-carbon steel, sintered porous bronze as its interlayer, with the compound of POM as its surface. And has good load capacity & wear-resistant. It's used in vehicle chassis, forming machine tools, steel metallurgical machinery, mineral mountain machinery, hydraulic industry and rolling steel industry, etc. It is without lead, can meet the requirements of environment protection.

■ PHYSICAL AND MECHANICAL PROPERTY

Performance index		Data
Load capacity P	Static load	250 N/mm ²
	Dynamic load	140 N/mm ²
Max. Sliding speed V	Grease lubricant	2.5m/s
Maximum PV value	Grease lubricant	2.8 N/ mm ² .m/s
Friction coef μ	Grease lubricant	0.05 ~ 0.25
Working temperature		-40°C ~ +130°C
Thermal conductivity		4 W/m · k
Coefficient of linear expansion		12 × 10 ⁻⁶ /K

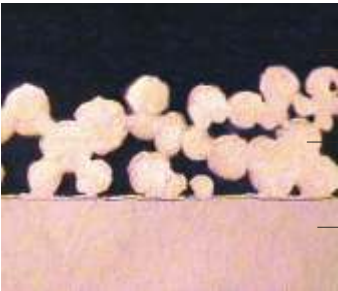

POM

Sintered porous bronze alloy layer


Steel base layer

■ INTRODUCTION OF MATERIAL SRIM 023(SF-2L)

It is made of high quality low-carbon steel, sintered porous bronze as its interlayer, with the compound of POM as its surface. And has good load capacity & wear-resistant. It's used in vehicle chassis, forming machine tools, steel metallurgical machinery, mineral mountain machinery, hydraulic industry and rolling steel industry, etc. It is without lead, can meet the requirements of environment protection.

■ PHYSICAL AND MECHANICAL PROPERTY

Performance index		Data
Load capacity P	Static load	250 N/mm ²
	Dynamic load	140 N/mm ²
Max. Sliding speed V	Grease lubricant	2.5m/s
Maximum PV value	Grease lubricant	2.8 N/ mm ² .m/s
Friction coef μ	Grease lubricant	0.05 ~ 0.25
Working temperature		-40°C ~ +130°C
Thermal conductivity		4 W/m · k
Coefficient of linear expansion		12 × 10 ⁻⁶ /K

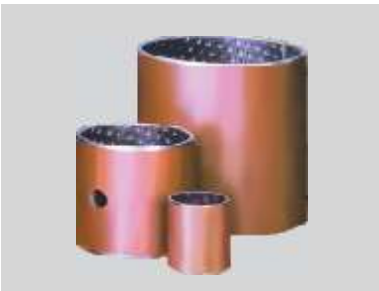

INTRODUCTION OF MATERIAL SRIM 026

The product is typified by its mild steel backing and the sintering middle of porosity bronze alloy, the rolling surface of modified mixture of PEEK and PTFE and other composites. The product is applied in the motor chassis ,forging press ,metallurgy machine, mine machine, irrigation industry, iron and steel industry, etc.

PHYSICAL AND MECHANICAL PROPERTY



PEEK + PTFE

Sintered porous
bronze alloy layer

Steel base layer


Performance index		Data
Max. permissible load P	Static load	140 N/mm ²
	Dynamic load	140 N/mm ²
Max. Sliding speed V	Grease lubricant	2.5 m/s
	Oiling	10 m/s
Max. PV value	Long operation	2.8 N/ mm ² .m/s
Friction factor μ	Grease lubricant	0.08 ~ 0.12
Temperature range		-150°C ~ +250°C
Thermal conductivity		52 W/m · k
Coefficient of linear expansion		11 × 10 ⁻⁶ /K

■ BUSHING O.D. AND SUITABLE SHAFT, HOUSING BORE TOLERANCES TABLE

BASIC DIMENSION	O.D. DIMENSION	SUITABLE HOUSING BORE D_H	SUITABLE SHAFT d_j
6~10	+0.055 +0.025	+0.015 0	0 -0.022
10~18	+0.065 +0.030	+0.018 0	0 -0.027
18~30	+0.075 +0.035	+0.021 0	0 -0.033
30~50	+0.085 +0.045	+0.025 0	0 -0.039
50~80	+0.100 +0.055	+0.030 0	0 -0.046
80~120	+0.12 +0.07	+0.035 0	0 -0.054
120~180	+0.17 +0.10	+0.040 0	0 -0.063
180~250	+0.21 +0.13	+0.046 0	0 -0.072
250~315	+0.26 +0.17	+0.052 0	0 -0.081

■ WALL THICKNESS TOLERANCES AND INSIDE, OUTSIDE CHAMFER TABLE

BASIC DIMENSION d	WALL THICKNESS TOLERANCES S_B	CHAMFER DIMENSION	
		f1	f2
8~18	1 $\begin{matrix} -0.020 \\ -0.045 \end{matrix}$	0.6 ± 0.4	max.0.4
18~25	1.5 $\begin{matrix} -0.025 \\ -0.055 \end{matrix}$	0.6 ± 0.4	0.4 ± 0.3
25~40	2 $\begin{matrix} -0.030 \\ -0.065 \end{matrix}$	0.6 ± 0.4	0.4 ± 0.3
40~60	2.5 $\begin{matrix} -0.040 \\ -0.085 \end{matrix}$	1.2 ± 0.6	0.6 ± 0.4
60~125	2.5 $\begin{matrix} -0.055 \\ -0.116 \end{matrix}$	1.8 ± 0.6	0.6 ± 0.4
125~300	2.5 $\begin{matrix} -0.065 \\ -0.120 \end{matrix}$		

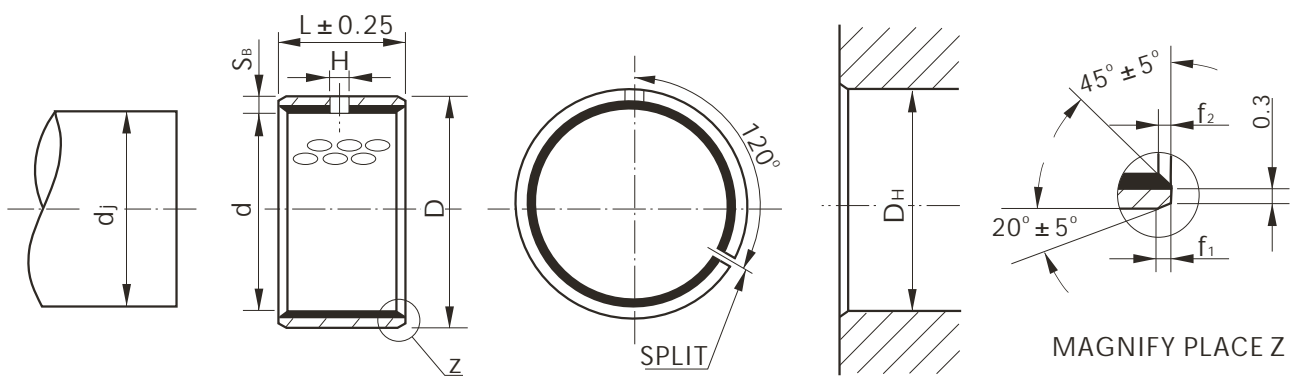

MAGNIFY PLACE Z

Unit: mm


DESIGNATION	d	D	L	H
SRIM 02 0608	6	8	8	
SRIM 02 0610			10	
SRIM 02 0710	7	9	10	/
SRIM 02 0808			8	
SRIM 02 0810	8	10	10	
SRIM 02 0812			12	
SRIM 02 1010			10	
SRIM 02 1012	10	12	12	
SRIM 02 1015			15	
SRIM 02 1020			20	
SRIM 02 1210			10	
SRIM 02 1212			12	
SRIM 02 1215	12	14	15	
SRIM 02 1220			20	
SRIM 02 1225			25	
SRIM 02 1310	13	15	10	
SRIM 02 1415			15	
SRIM 02 1420	14	16	20	
SRIM 02 1425			25	
SRIM 02 1510			10	
SRIM 02 1512	15	17	12	
SRIM 02 1515			15	
SRIM 02 1525			25	
SRIM 02 1615			15	
SRIM 02 1620	16	18	20	
SRIM 02 1625			25	
SRIM 02 1815			15	
SRIM 02 1820	18	20	20	
SRIM 02 1825			25	
SRIM 02 2010			10	
SRIM 02 2015	20	23	15	
SRIM 02 2020			20	

DESIGNATION	d	D	L	H
SRIM 02 2025	20	23	25	4
SRIM 02 2030			30	
SRIM 02 2215			15	
SRIM 02 2220	22	25	20	
SRIM 02 2225			25	
SRIM 02 2230			30	
SRIM 02 2415			15	
SRIM 02 2420	24	27	20	
SRIM 02 2425			25	
SRIM 02 2430			30	
SRIM 02 2515			15	
SRIM 02 2520			20	
SRIM 02 2525	25	28	25	
SRIM 02 2530			30	
SRIM 02 2550			50	
SRIM 02 2820			20	
SRIM 02 2825	28	32	25	
SRIM 02 2830			30	
SRIM 02 3020			20	
SRIM 02 3030	30	34	30	
SRIM 02 3040			40	
SRIM 02 3220			20	
SRIM 02 3230			30	
SRIM 02 3235	32	36	35	
SRIM 02 3240			40	
SRIM 02 3520			20	
SRIM 02 3530	35	39	30	
SRIM 02 3535			35	
SRIM 02 3550			50	
SRIM 02 3635	36	40	35	
SRIM 02 3720	37	41	20	
SRIM 02 3730			30	

DESIGNATION		d	D	L	H	DESIGNATION		d	D	L	H	
SRIM 02	4020	40	44	20		SRIM 02	9080	90	95	80		
SRIM 02	4030			30		SRIM 02	9090			90		
SRIM 02	4040			40		SRIM 02	90100			100		
SRIM 02	4050			50		SRIM 02	9530	30				
SRIM 02	4520	45	50	20		SRIM 02	9560	95	100	60		
SRIM 02	4530			30		SRIM 02	95100	100				
SRIM 02	4540			40		SRIM 02	10030	30				
SRIM 02	4545			45		SRIM 02	10050	50				
SRIM 02	4550	50	55	50		SRIM 02	10060	100	105	60		
SRIM 02	5030			30		SRIM 02	10080			80		
SRIM 02	5040			40		SRIM 02	10095			95		
SRIM 02	5050			50		SRIM 02	100115	115				
SRIM 02	5060	55	60	60		SRIM 02	10560	105	110	60	9.5	
SRIM 02	5520			20		SRIM 02	105110			110		
SRIM 02	5525			25		8	SRIM 02			105115		115
SRIM 02	5530			30		SRIM 02	11050	50				
SRIM 02	5540	60	65	40		SRIM 02	11060	110	115	60		
SRIM 02	5550			50		SRIM 02	110110			110		
SRIM 02	5560			60		SRIM 02	110115			115		
SRIM 02	6030			30		SRIM 02	11550	50				
SRIM 02	6040	60	65	40		SRIM 02	11570	115	120	70		
SRIM 02	6060			60		SRIM 02	12060			60		
SRIM 02	6070			70		SRIM 02	120100			100		
SRIM 02	6550			50		SRIM 02	120110	110				
SRIM 02	6560	65	70	60		SRIM 02	12560	125	130	60		
SRIM 02	6570			70		SRIM 02	125100			100		
SRIM 02	7040			40		SRIM 02	125110			110		
SRIM 02	7050			50		SRIM 02	13050	50				
SRIM 02	7065	70	75	65		SRIM 02	13060	130	135	60		
SRIM 02	7070			70		SRIM 02	13080			80		
SRIM 02	7080			80		SRIM 02	130100			100		
SRIM 02	7540			40		SRIM 02	13560	60				
SRIM 02	7560	75	80	60		SRIM 02	13580	135	140	80		
SRIM 02	7580			80		SRIM 02	14050			50		
SRIM 02	8040			40		SRIM 02	14060			60		
SRIM 02	8060			60		SRIM 02	14080	80				
SRIM 02	8080	80	85	80		SRIM 02	140100	140	145	100	/	
SRIM 02	80100			100		9.5	SRIM 02			15050		50
SRIM 02	8530			30		SRIM 02	15060			60		
SRIM 02	8540			40		SRIM 02	15080	80				
SRIM 02	8560	85	90	60		SRIM 02	150100	150	155	100		
SRIM 02	8580			80		SRIM 02	16050			50		
SRIM 02	85100			100		SRIM 02	16060			60		
SRIM 02	9040			40		SRIM 02	16080	80				
SRIM 02	9060	90	95	60		SRIM 02	160100	160	165	100		


DESIGNATION	d	D	L	H
SRIM 02 17050	170	175	50	
SRIM 02 17060			60	
SRIM 02 17080			80	
SRIM 02 170100			100	
SRIM 02 18050	180	185	50	
SRIM 02 18060			60	
SRIM 02 18080			80	
SRIM 02 180100			100	
SRIM 02 19050	190	195	50	
SRIM 02 19060			60	
SRIM 02 19080			80	
SRIM 02 190100			100	
SRIM 02 190120			120	
SRIM 02 20050	200	205	50	
SRIM 02 20060			60	
SRIM 02 20080			80	
SRIM 02 200100			100	
SRIM 02 200120			120	
SRIM 02 22050	220	225	50	
SRIM 02 22060			60	
SRIM 02 22080			80	
SRIM 02 220100			100	
SRIM 02 220120			120	
SRIM 02 24050	240	245	50	

DESIGNATION	d	D	L	H	
SRIM 02 24060	240	245	60		
SRIM 02 24080			80		
SRIM 02 240100			100		
SRIM 02 240120			120		
SRIM 02 25050	250	255	50		
SRIM 02 25060			60		
SRIM 02 25080			80		
SRIM 02 250100			100		
SRIM 02 250120			120		
SRIM 02 26050	260	265	50		
SRIM 02 26060			60		
SRIM 02 26080			80		／
SRIM 02 260100			100		
SRIM 02 260120			120		
SRIM 02 28050	280	285	50		
SRIM 02 28060			60		
SRIM 02 28080			80		
SRIM 02 280100			100		
SRIM 02 280120			120		
SRIM 02 30050	300	305	50		
SRIM 02 30060			60		
SRIM 02 30080			80		
SRIM 02 300100			100		
SRIM 02 300120			120		

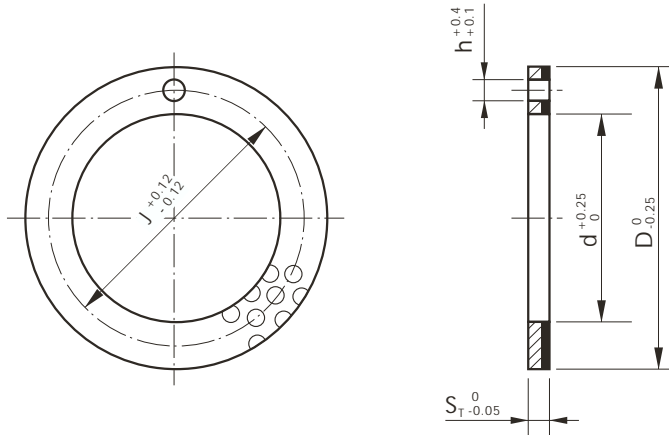

Unit: mm

DESIGNATION	$d^{+0.25}_{0}$	$D^{0}_{-0.25}$	$S_T^{0}_{-0.05}$	$J^{+0.12}_{-0.12}$	$h^{+0.4}_{+0.1}$
SRIM 02 10 D	12	24		18	1.5
SRIM 02 12 D	14	26		20	
SRIM 02 14 D	16	30		22	2
SRIM 02 16 D	18	32		25	
SRIM 02 18D	20	36		28	
SRIM 02 20 D	22	38	1.5	30	3
SRIM 02 22 D	24	42		33	
SRIM 02 24 D	26	44		35	
SRIM 02 26 D	28	48		38	
SRIM 02 30 D	32	54		43	
SRIM 02 36 D	38	62		50	
SRIM 02 40 D	42	66		54	4
SRIM 02 46 D	48	74	2	61	
SRIM 02 50 D	52	78		65	

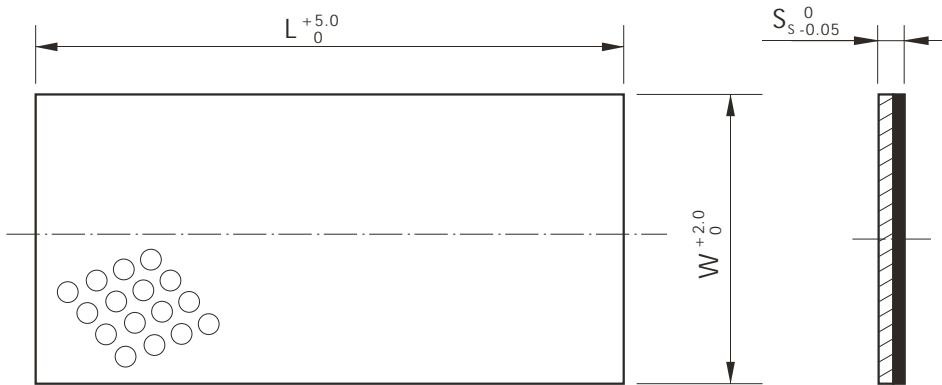

Unit: mm

DESIGNATION	L $^{+0.5}$ ₀	W $^{+2.0}$ ₀	S_s 0 _{-0.05}
SRIM 02 P 10125	500	125	1
SRIM 02 P 15125			1.5
SRIM 02 P 20125			2.0
SRIM 02 P 25125			2.5
SRIM 02 P 30125			3.0


■ SUITABLE SHAFT, HOUSING BORE TOLERANCE TABLE

BASIC DIMENSION d	SUITABLE HOUSING BORE DH	SUITABLE SHAFT dj
$\frac{3}{8}$	0.4687 0.4694	0.3648 0.3639
$\frac{7}{16}$	0.5312 0.5319	0.4273 0.4263
$\frac{1}{2}$	0.5937 0.5944	0.4897 0.4887
$\frac{9}{16}$	0.6562 0.6569	0.5522 0.5512
$\frac{5}{8}$	0.7187 0.7195	0.6146 0.6136
$\frac{11}{16}$	0.7812 0.7820	0.6770 0.6760
$\frac{3}{4}$	0.8750 0.8758	0.7390 0.7378
$\frac{7}{8}$	1.0000 1.0008	0.8639 0.8627
1	1.1250 1.1258	0.9888 0.9876
$1\frac{1}{8}$	1.2812 1.2822	1.1138 1.1126
$1\frac{1}{4}$	1.4062 1.4072	1.2387 1.2371
$1\frac{3}{8}$	1.5312 1.5322	1.3635 1.3619

BASIC DIMENSION d	SUITABLE HOUSING BORE DH	SUITABLE SHAFT dj
$1\frac{1}{2}$	1.6572 1.6562	1.4884 1.4868
$1\frac{5}{8}$	1.7812 1.7822	1.6133 1.6117
$1\frac{3}{4}$	1.9375 1.9385	1.7383 1.7367
$1\frac{7}{8}$	2.0625 2.0637	1.8632 1.8616
2	2.1875 2.1887	1.9881 1.9863
$2\frac{1}{4}$	2.4375 2.4387	2.2378 2.2360
$2\frac{1}{2}$	2.6875 2.6887	2.4875 2.4857
$2\frac{3}{4}$	2.9375 2.9387	2.7351 2.7333
3	3.1875 3.1889	2.9849 2.9831
$3\frac{1}{2}$	3.6875 3.6889	3.4844 3.4822
4	4.1875 4.1889	3.9839 3.9817

■ WALL THICKNESS TOLERANCES AND INSIDE, OUTSIDE CHAMFER TABLE

BASIC DIMENSION d	WALL THICKNESS TOLERANCES S_B	CHAMFER DIMENSION	
		f1	f2
$\sim \frac{3}{4}$	0.0510 0.0500	0.0394 0.0079	Max.0.0157
$\frac{3}{4} \sim 1$	0.0669 0.0657	0.0394 0.0079	0.0276 0.0039
1 $\sim 1\frac{5}{8}$	0.0824 0.0810	0.0630 0.0315	0.0276 0.0039
$1\frac{5}{8} \sim 2\frac{1}{2}$	0.0980 0.0962	0.0945	0.0394
$2\frac{1}{2} \sim 4$	0.0991 0.0965	0.0473	0.0079

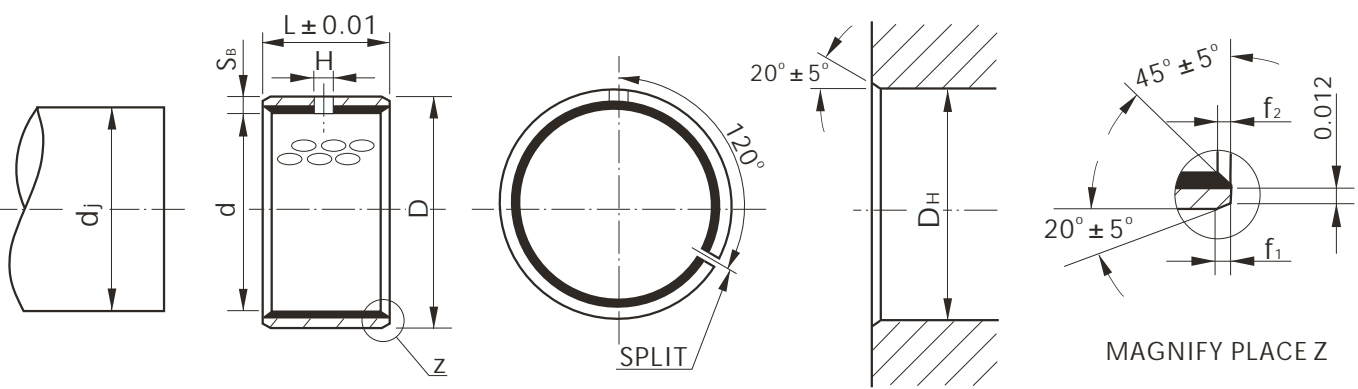


Unit: inch

DESIGNATION	d	D	L	H	DESIGNATION	d	D	L	H
SRIM 02 06Y06			$\frac{3}{8}$		SRIM 02 18Y12	$1 \frac{1}{8}$	$1 \frac{9}{32}$	$\frac{3}{4}$	
SRIM 02 06Y08	$\frac{3}{8}$	$1 \frac{15}{32}$	$\frac{1}{2}$		SRIM 02 18Y16			1	
SRIM 02 06Y12			$\frac{3}{4}$		SRIM 02 20Y12			$\frac{3}{4}$	
SRIM 02 07Y08			$\frac{1}{2}$		SRIM 02 20Y16	$1 \frac{1}{4}$	$1 \frac{13}{32}$	1	
SRIM 02 07Y12	$\frac{7}{16}$	$1 \frac{17}{32}$	$\frac{3}{4}$		SRIM 02 20Y20			$1 \frac{1}{4}$	$\frac{1}{4}$
SRIM 02 08Y06			$\frac{3}{8}$		SRIM 02 20Y28			$1 \frac{3}{4}$	
SRIM 02 08Y08			$\frac{1}{2}$		SRIM 02 22Y16			1	
SRIM 02 08Y10	$\frac{1}{2}$	$1 \frac{19}{32}$	$\frac{5}{8}$		SRIM 02 22Y22	$1 \frac{3}{8}$	$1 \frac{17}{32}$	$1 \frac{3}{8}$	
SRIM 02 08Y14			$\frac{7}{8}$		SRIM 02 22Y24			$1 \frac{1}{2}$	
SRIM 02 09Y08			$\frac{1}{2}$	$\frac{5}{32}$	SRIM 02 22Y28			$1 \frac{3}{4}$	
SRIM 02 09Y12	$\frac{9}{16}$	$1 \frac{21}{32}$	$\frac{3}{4}$		SRIM 02 24Y16			1	
SRIM 02 10Y08			$\frac{1}{2}$		SRIM 02 24Y20	$1 \frac{1}{2}$	$1 \frac{21}{32}$	$1 \frac{1}{4}$	
SRIM 02 10Y10	$\frac{5}{8}$	$1 \frac{23}{32}$	$\frac{5}{8}$		SRIM 02 24Y24			$1 \frac{1}{2}$	
SRIM 02 10Y12			$\frac{3}{4}$		SRIM 02 24Y32			2	
SRIM 02 10Y14			$\frac{7}{8}$		SRIM 02 26Y16			1	
SRIM 02 11Y14	$1 \frac{11}{16}$	$1 \frac{7}{8}$	$\frac{7}{8}$		SRIM 02 26Y24	$1 \frac{5}{8}$	$1 \frac{25}{32}$	$1 \frac{1}{2}$	
SRIM 02 12Y08			$\frac{1}{2}$		SRIM 02 26Y32			2	
SRIM 02 12Y12	$\frac{3}{4}$	1	$\frac{3}{4}$		SRIM 02 28Y16			1	$\frac{5}{16}$
SRIM 02 12Y16			1		SRIM 02 28Y24	$1 \frac{3}{4}$	$1 \frac{15}{16}$	$1 \frac{1}{2}$	
SRIM 02 14Y12			$\frac{3}{4}$		SRIM 02 28Y28			$1 \frac{3}{4}$	
SRIM 02 14Y14	$\frac{7}{8}$	$1 \frac{1}{8}$	$\frac{7}{8}$		SRIM 02 28Y32			2	
SRIM 02 14Y16			1	$\frac{1}{4}$	SRIM 02 30Y16			1	
SRIM 02 16Y12			$\frac{3}{4}$		SRIM 02 30Y24	$1 \frac{7}{8}$	$2 \frac{1}{16}$	$1 \frac{1}{2}$	
SRIM 02 16Y16	1	$1 \frac{9}{32}$	1		SRIM 02 30Y30			$1 \frac{7}{8}$	
SRIM 02 16Y24			$1 \frac{1}{2}$		SRIM 02 30Y32			2	


DESIGNATION	d	D	L	H
SRIM 02 30Y36	1 $\frac{7}{8}$	2 $\frac{1}{16}$	2 $\frac{1}{4}$	
SRIM 02 32Y16			1	
SRIM 02 32Y24	2	2 $\frac{3}{16}$	1 $\frac{1}{2}$	
SRIM 02 32Y32			2	
SRIM 02 32Y40			2 $\frac{1}{2}$	
SRIM 02 36Y32			2	
SRIM 02 36Y36	2 $\frac{1}{4}$	2 $\frac{7}{16}$	2 $\frac{1}{4}$	$\frac{5}{16}$
SRIM 02 36Y40			2 $\frac{1}{2}$	
SRIM 02 40Y24			1 $\frac{1}{2}$	
SRIM 02 40Y32	2 $\frac{1}{2}$	2 $\frac{11}{16}$	2	
SRIM 02 40Y40			2 $\frac{1}{2}$	
SRIM 02 44Y32	2 $\frac{3}{4}$	2 $\frac{15}{16}$	2	
SRIM 02 44Y40			2 $\frac{1}{2}$	

DESIGNATION	d	D	L	H
SRIM 02 44Y48	2 $\frac{3}{4}$	2 $\frac{15}{16}$	3	$\frac{5}{16}$
SRIM 02 44Y56			3 $\frac{1}{2}$	
SRIM 02 48Y24			1 $\frac{1}{2}$	
SRIM 02 48Y32			2	
SRIM 02 48Y40	3	3 $\frac{3}{16}$	2 $\frac{1}{2}$	
SRIM 02 48Y48			3	
SRIM 02 48Y60			3 $\frac{3}{4}$	$\frac{3}{8}$
SRIM 02 56Y40			2 $\frac{1}{2}$	
SRIM 02 56Y48	2 $\frac{1}{2}$	3 $\frac{11}{16}$	3	
SRIM 02 56Y60			3 $\frac{3}{4}$	
SRIM 02 64Y48			3	
SRIM 02 64Y60	4	4 $\frac{3}{16}$	3 $\frac{3}{4}$	
SRIM 02 64Y76			4 $\frac{3}{4}$	

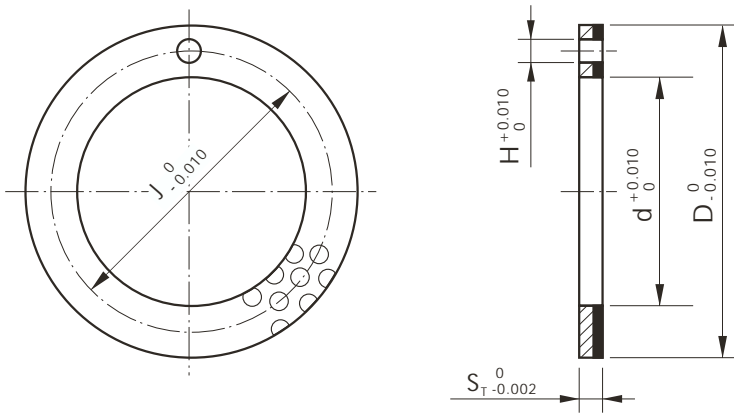

Unit: inch

DESIGNATION	$d_{+0.010}^0$	$D_{-0.010}^0$	$S_{T-0.002}^0$	$J_{-0.010}^0$	$h_{+0.01}^0$
SRIM 02 W Y 06	0.500	0.875		0.692	0.067
SRIM 02 W Y 07	0.562	0.990		0.786	
SRIM 02 W Y 08	0.625	1.125		0.880	0.099
SRIM 02 W Y 09	0.687	1.187		0.942	
SRIM 02 W Y 10	0.750	1.250		1.005	
SRIM 02 W Y 11	0.812	1.375		1.099	0.130
SRIM 02 W Y 12	0.875	1.500	0.066	1.192	
SRIM 02 W Y 14	1.000	1.750		1.380	0.161
SRIM 02 W Y 16	1.125	2.000		1.567	
SRIM 02 W Y 18	1.250	2.125		1.692	
SRIM 02 W Y 20	1.375	2.250		1.817	0.192
SRIM 02 W Y 22	1.500	2.500		2.005	
SRIM 02 W Y 24	1.625	2.625		2.130	0.192
SRIM 02 W Y 26	1.750	2.750		2.255	
SRIM 02 W Y 28	2.000	3.000		2.505	
SRIM 02 W Y 30	2.125	3.125	0.097	2.630	0.192
SRIM 02 W Y 32	2.250	3.250		2.755	

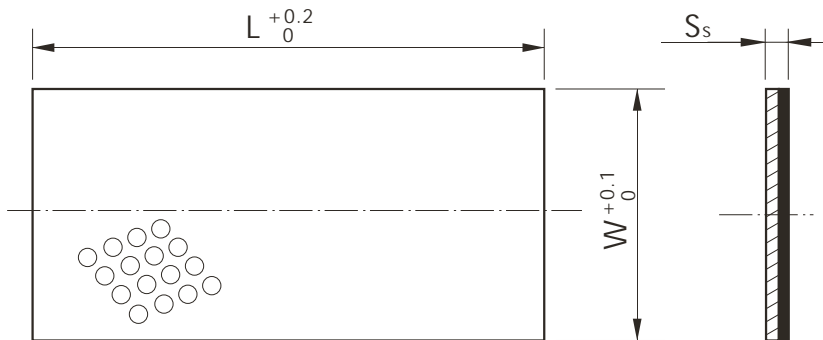

Unit: inch

DESIGNATION	$L^{+0.2}_0$	$W^{+0.1}_0$	$S_s^{0}_{-0.0035}$
SRIM 02 P Y 001	19.69	2.75	0.0492
SRIM 02 P Y 002		0.0642	
SRIM 02 P Y 003		4	0.0795
SRIM 02 P Y 004		0.0949	